

Data Sheet

CSE-M53N | Serial Ethernet Module



Overview


CSE-M53N is an embedded Serial to Ethernet converter module which is pin compatible with CSE-M53N. This compact module is perfect solution for low-cost projects and those who plan to move forward to next generation internet protocol, IPv6.

For various industrial applications, CSE-M53N has been designed to keep high performance at industrial temperature range of $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$ and remarkable debugging function. Furthermore, CSE-M53N additionally provides Separator for packet fragmentation as well as basic functions such as DNS, DDNS and Telnet COM Port Control Option.


Features

- 1 x UART(3.3V level)
- 10/100Mbps Ethernet
- Very compact module type (20mm x 24mm)
- High speed UART x 1 (up to 921.6Kbps)
- Industrial temperature range ($-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$)
- SSL (Secure Sockets Layer)
- Multiple Connection (F/W v2.3A or later)
- Separator settings for packet fragmentation
- IPv4/IPv6 dual stack
- Flexible configuration and network communication by 'AT Commands' (patent)

Application

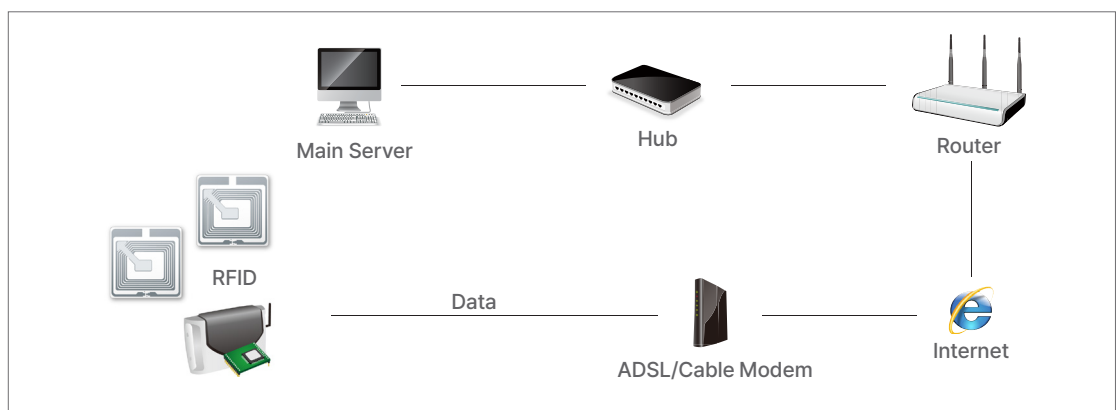

System Diagram

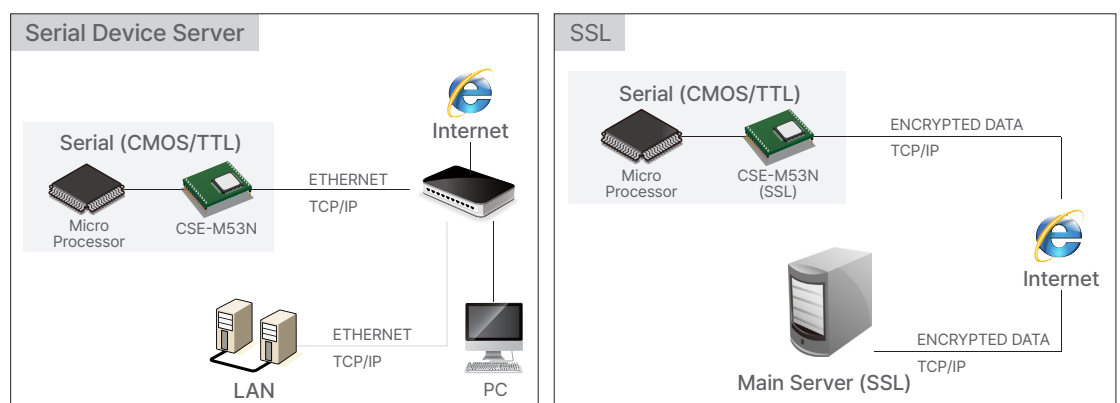

Specifications

Serial Physical Interface	
Serial interface	3.3V level with 5V tolerant input RXD, TXD, RTS(TXDE for RS485), CTS, GND
Connector	1 X 10 2mm pitch pin header X 2
Serial Port Property	
Baudrate	300bps ~ 921,600bps
Data Bits	8bits, 7bits with parity
Parity	None, Even, Odd, Mark, Space
Stop Bit	1, 1.5, 2
Network Physical Interface	
Network Interface	10Base-T/100Base-TX Ethernet(RJ45) Ethernet Speed Auto Sense 1:1 or Cross-over Cable Auto Sense Simple External Circuit Required
Software Functions	
Protocols	IPv4/IPv6 dual stack, ICMPv6/TCPv6/UDPv6 TCP, UDP, IP, ICMP, ARP, TELNET DHCP, PPPoE, DNS, DDNS
Security	SSL (Secure Socket Layer) IP & MAC filtering - Restrict host or network Password for Configuring
Communication Mode	TCP Server (T2S) TCP Client (COD) TCP Server/Client with AT command (ATC)-Patent UDP Mode (U2S)
Additional Functions	Separator settings for packet fragmentation TCP Server / Client Mode Sending MAC address Option
Indicators (LEDs)	
Status	The current status
DTR	TCP Connection Indicator
Management	
ezManager	Configuration and Monitoring Tool through Network and Serial
Telnet	Telnet Login
AT Command	Configuring in ATC Mode - Patent
Supplementary Software	
ezManager	Configuration Tool for Windows
ezVSP	Serial to Network Virtual Driver for Windows
ezTerm	Simple TCP/IP Communication Test Tool
Dimension	
Size	20mm X 24mm X 9.1mm
Operating Environments	
Input Voltage	DC 3.3V
Current Consumption	150mA (100M Ethernet), 200mA (10M Ethernet)
Operating Temperature	-40°C ~ +85°C
Storage Temperature	-40°C ~ +85°C